

EROSION AND SEDIMENT CONTROL NOTES:

GENERAL PROJECT NOTES:

SECTION A. GENERAL SEQUENCE OF CONSTRUCTION

These quidelines shall apply to all work consisting of all temporary and/or permanent measures to control water pollution and soil erasion as may be required during the construction of the project, In general, all construction activities shall proceed in a workmanitie manner with the stated intention to minimize the time to completion as well as the prevention of the pollution of any inland wetlands, watercoverse, water bodies or conduit carrying surface water. The contractor shall limit, insofar as passible, the surface area of earth materials exposed by construction methods, and to immediately provide permanent and/or temporary pollution control measures to prevent contamination of adjacent wetlands, watercoverses or water bodies, and to fully manage possible erasion conditions throughout the construction limits. No construction shall commence until the herein stated soil erasion and sadiment control plan has been certified and those control includes the special process of the proceed until a Connectical Department of Energy and Environmental Protection permit DEEP-PED-GP-015 has been obtained.

SECTION B. GENERAL CONSTRUCTION NOTES

1. Material Storage and Vehicular Traffic Restrictions

- a. Stockpiling of materials shall be confined within the oreas of construction disturbance. Material stockpiles shall be maintained in a safe and workmanlike manner. Trash containers and callection points shall be maintained throughout the construction period. All refuse is to be removed to an appropriate facility.
- b. Vehicular movement shall be limited to established construction access points and parking areas. Unnecessary encroachment of construction equipment or other vehicles shall not be allowed in non-construction portions of the property. Vehicular access to access outside the areas of disturbance shall be restricted to the minimum necessary to perform essential and required construction activities.

2. General Notes

- a. All construction methods to conform to Conn, Department of Transportation Standards and Specifications for Roads, Bridges and Incidental Construction (Form 817) and/or the Town of Lisbon standard specifications.
- b. A pre-construction meeting shall be conducted prior to the commencing of all construction activities.
- c. Any unsuitable materials within areas of pavement are to be removed and replaced with suitable material as directed by the Owner.
- d. The Town of Lisbon may require changes to the plans in order to address problems that may arise due to field conditions.

3 Construction Not

- a. All existing utilities are approximate only. It is the responsibility of the contractor to verify all locations prior to construction. "Call Before You Dig" is to be notified prior to any construction. (BOO-922-4455). The contractor is solely responsible for confirming the location of existing utilities prior to construction and for coordinating connection of existing and proposed utilities.
- b. The contractor is responsible for obtaining all applicable construction permits, prior to construction, from the State of Connecticut, Town of Lisban along with any other applicable agencies. All agencies are to be notified at least 48 hours prior to construction. A pre-construction meeting is to be held with the Town Planner prior to the commencement of any disturbance or construction.
- c. The E 4 5 Norrative contained in these plans are considered part of the design of this project and are to be consulted as construction details.
- d. All erasion and sedimentation control measures applicable to a given area of construction shall be in place and approved by Town Staff prior to the commencement of work in that area.
- e. All upland areas of proposed fill shall be finish graded with 4° of topsoil and seeded with an appropriate seed mixture based on recommendation appropriate for use and season as delineated by the Soil Erosion and Sedimentation Control Norratives.
- f. All clearing limits shall be physically marked in the field and approved by Town staff prior to any clearing or grubbing. The contractor shall be responsible for replacement plantings suitable to Town of Lisbon Planning staff for any significant encroachment beyond clearing limits.
- g. All proposed catch basins shall be hooded as detailed in these plans,
- h. All drainage structures and appurtenances shall be constructed in accordance with specifications set forth by Form 817, (latest revision) and the Town of Lisbon Road and Parinage Standards.
- All excess material resulting from excavation and construction shall be properly disposed of off-site. No material shall be placed beyond the limits of construction or within wetland areas.
- All utilities are to be installed and constructed in accordance with specifications set forth by the local governing utility.

EROSION AND SEDIMENT CONTROL NOTES

PROJECT DATA

FIELD BOOK BOOK in 18 Fp. 37-74

DWG FILE 19-107 Special Permit 02.dwg

3 OF 4

All erosion and sediment control measures and construction practices shall be as described herein and further detailed in the "2002 Connecticut Guidelines for Soil Erosion and Sediment Control", and as periodically amended, published by the Connecticut Council on Soil and Water Conservation and the Connecticut Department of Energy and Environmental Protection.

SECTION A. BEST MANAGEMENT PRACTICES FOR PROTECTION OF THE ENVIRONMENT

- No construction shall proceed until proper sedimentation and erosion control methods have been installed as the sequence of construction necessitates.
- No equipment, materials or machinery shall be stored, cleaned or repaired within one-hundred (100) feet of any wetland or watercourse.
- 3. No materials resulting from any clearing activity shall be disposed of in any wetland or
- from the Lisbon Inland Netland and Natercourse Commission will be required for any hour road or temporary structure placed in wetlands or watercourses.
- 5. No soil fill or other materials (construction debris) shall be deposited in surrounding wetlands or undercourses except as otherwise approved by the Town of Lisbon Inland Metland and Matercourse Commission and depicted herean.
- 6. Where dewatering is necessory, the pump shall not discharge directly into any wettond or watercourse. Proper methods and devices shall be utilized, such as pumping the water into a temperary sedimentation pool, providing surge protection at the inlet and the autlet of pumps, floating the inlake of the pump, or other methods to minimize and retain the suspended solids. If the pumping operation is cousing turbidity problems, said operation shall coose until feasible means of controlling turbidity are determined and implemented.
- 7. All temporary fill, storage or stockpile areas shall be properly stabilized to prevent erosion and suitably contained to prevent turbid runoff from reentering a wetland or watercourse. All areas affected by temporary fills must be restored to their original contours, and revegetated with suitable vegetation. The use of temporary fill and/or excavation shall be minimized to only that area required to perform the work.

- 8. Dumping of oil or other deleterious materials on the ground is forbidden. The Developer or Contractor shall provide a means of catching, retaining and properly disposing of drained oil, removed oil filters, or other deleterious material from engipment used on site. Vehicle maintenance except daily and periodic procedures shall be completed off site. All oil spills shall be immediately reported to the Department of Energy and Environmental Protection/Hazardous Talterials Office. Failure to do so may result in the imposition of fines under the applicable Connecticut General Statutes.
- 9. Every precaution shall be used while working near a waterway to prevent and minimize the degradation of the existing water quality. All activities shall be in conformance to and consistent with all applicable water quality standards and management practices as set forth by local, state and federal agencies.
- 10. During the period of construction, the Contractor is responsible for all erosion and sediment control measures. Said measures shall be inspected weekly and after each rainstorm and during a major storm event. Accumulated deposits of sediment and silt shall be periodically removed from the upstream side of the erosion and sediment control barriers, and upon establishment of permonent seeding and mulching. Such materials removed shall be spread and stabilized in non-wetland areas which are not subject to erosion, or which are not to be paved or built upon.
- II. Hay bales, silt fencing and other erosion and sediment control measures shall be repaired, cleaned and/or replaced as necessary throughout the construction period in order to maintain complete and integral erosion and sediment control protection. Once in place all erosion and sediment control facilities and measures are to remain in place and in proper contition and be continuously maintained until final grading has been completed, all disturbed areas up gradient of said facilities have been permanently stabilitied and all newly grassed areas have had at least two mowings. Following such permanent stabilitation, the facilities shall be dismantled, removed, and disposed of in an approved manner. Additional erosion and sediment control measures beyond those shown on the plans or prescribed herein shall be put in place, whenever necessary, to address field conditions and/or as ordered by the Town of Lisbon.
- 12. Disturbance of the land shall be limited to the minimum extent necessary to complete the proposed development. All existing trees and shrubs shall be conserved where possible, except those whose removal is required to perform the proposed work. The limits of disturbance shall be established in the field prior to starting any actual construction activities and shall be generally as depicted by the grading/site development drawings.

SECTION B. TEMPORARY AND PERMANENT VEGETATIVE COVER

- I. If final grading must be delayed for more than thirty days after the construction activities are completed and/or if permanent seeding is not seasonably possible within thirty days of completion of final grading, temporary soil stabilization measures consisting of heavy mulching or temporary seeding shall be performed. This shall also apply to soils stackpiled in excess of sixty days. Temporary seeding shall use arnual ryegrass applied at a rate of 2 lbs., 74000 sq. ft. Temporary mulch shall be used free hay or stroup, or air-defined wood that the shall be saverely to inlary powards per one thousand square feet (70-90 lbs. 74000 sq. ft.) for hey or stroup, and 15-275 lbs. 74000 sq. ft. for how or stroup, and 15-275 lbs. 74000 sq. ft. for wood chips.
- Where a permanent seedbed is to be established, there shall be a minimum depth of four inches of topsoil spread, fine-graded and roked to remove large stores and other debris. Limestone shall be applied at a rate of ninety pounds per one thousand square feet (40 lbs. /1000 sq. ft.).
- It is recommended that the soil be tested to determine the best fertilizer application rate; however, the following rates shall generally apply.

4. Spring Seeding

a. Prior to seeding, 300 pounds of 10-10-10 fertilizer per acre (7 lbs./1000 sq. ft.) shall be worked uniformly into the topsoil to a depth of four inches with a whisk, a spring tooth harrow or other suitable equipment; then six to eight weeks later surface apply an additional 300 pounds of 10-10-10 fertilizer per acre.

5. Fall Seedin

- a. Prior to seeding, 600 pounds of 10-10-10 fertilizer per ocre (14 lbs. /1000 sq. ft.) shall be worked uniformly into the topsoil to a depth of four inches with a whisk, a spring tooth horrow or other suitable equipment.
- b. Permanent seedbeds are to be planted between Plante 15 to June 15 (Spring) and August 15 to October 15 (Fall). All Fertiliting/planting applications shall be performed porallel with the final grading of the slope. After seed application, cover gross and legime seeds with not more than 1/4 inch of soil with suitable equipment (except when hydroseeding).
- Select adapted seed mixture for all finished grasses as follows:

Wetland Areas				
Reed Canary Grass	35%	28	lbs/oc	(0.70 lbs/1000 sq. fl.)
Fine Leaf Fescue	35%	28	1bs/oc	(0.70 lbs/1000 sq. ft.)
Bird's foot Trefoil	30%	24	Ibs/oc	(0.60 lbs/1000 sq. ft.)
Full to Partial 5	oun Areas			
Kentucky Bluegrass	45%	20	lbs/oc	(0.50 lbs/1000 sq. ft.)
Creeping Red Fescue	45%	20	Ibs/oc	(0.50 lbs/1000 sq. ft.)
Perennial Ryegrass	10%	5	lbs/ac	(0.10 lbs/1000 sq. ft.)
Shady Areas				
Creeping Red Fescue	90%	50	lbs/ac	(1.00 lbs/1000 sq. ft.)
Perennial Ryegrass	10%	5	lbs/ac	(0.10 lbs/1000 sq. ft.)
Droughty Areas				
Creeping Red Fescue	65%	40	lbs/oc	(0.90 lbs/1000 sq fl.)
Tall Fescus	354		20 160	(as (0.50 the (1000 0))

Immediately following seeding, the seedbeds shall be mulched with straw or hay free from weeds and coarse matter at a rate of seventy to ninety pounds per one thousand square feet (70-90 lbs/1000 sq. ft.) Mulch shall be anchored immediately ofter spreading by application of a liquid mulch binder or mulch netting applied in occordance with the manufacturer's recommendations.

SECTION C. INSPECTION

- The Owner, or its duly appointed representative, shall be responsible to inspect the site in accordance with the procedures as outlined in the "General Permit for the Discharge of Stormwater and Dewatering Meale Maters from Construction Activities" (DEEP-PED-GP-015) as adopted by the Connecticut Department of Energy and Environmental Protection.
- 2. The Owner shall inspect all disturbed areas of construction activity that have not been finally stabilized, structural control measures, and locations where vehicles enter or exit the site AT LEAST ONCE EVERY SEVEN CALENDAR DATS AND WITHIN 24 HOURS OF THE END OF A STORM EVENT THAT IS OF A MAGNITUDE OF 0.5 INCHES OR GREATER. Where sites have been temporarily or finally stabilized, such inspection shall be conducted at least once every month for three consecutive months.
- 3. Disturbed areas and areas used for storage of materials that are exposed to precipitation shall be inspected for evidence of, or the potential for pollutants entering the drainage system. Erosion and sediment control measures identified in the plan shall be inspected to ensure that they are operating correctly. Where discharge locations or points are assessable, they shall be inspected to accentain unbether erosion control measures are affective in preventing significant imposts to receiving unders. Locations where vehicles enter or exit the site shall be inspected for evidence of aff-site sediment tracking.
- 4. A report shall be made summarizing the scope of the inspection including the following name and apulifications of personnel making the inspection, the date of the inspection, major observations relating to the implementation of the stormwater control plan, and actions taken. The report shall be retained as part of the stormwater control plan for at least


three years after the date of inspection


SECTION D MAINTENANCE

- I. During the period of construction, all erosion and sediment control measures shall be inspected weekly, ofter each roin event and during a major storm event. Accumulated deposits of sediment and silt shall be periodically rerroved from the upstream side of the erosion and sediment control barriers, and upon establishment of permanent seeding and mulching. Such materials removed shall be spread and stabilized in non-wetland areas which are not subject to erosion, and which are not within future construction areas.
- 2. Hay bales, silt fencing and other erosion and sediment control measures shall be repaired, cleaned and/or replaced as necessary throughout the construction period in order to maintain complete and integral erosion and sediment control protection. Once installed, all erosion and sediment control facilities and measures are to remain in place and in proper condition and be continuously maintained until final gradial has been completed, all disturbed areas up gradient of said facilities have been permanently stabilized and all neutly grassed areas have had at least two mountings. Following such permanent stabilization, the facilities shall be dismantled, and disposed of in an approved manner.
- Additional erosion and sediment control measures beyond those depicted herein shall be put in place whenever necessary to address field conditions and/or as ordered by the Town of Norwich, or their agent.


SECTION E RESPONSIBILITY


- The owner (or its dully appointed representative) shall be personally responsible for implementing this erasion and sediment control plan and enforcing the prescribed safeguards during the construction period.
- 2. This responsibility includes the installation and maintenance of control measures throughout the construction period, informing all parties engaged on the construction site of the requirements and objectives of the plan, notifying the proper town agencies and officials of any transfer of this responsibility, and conveying a copy of the approved erosion and sediment control plan if the title of the land is transferred to a third party.



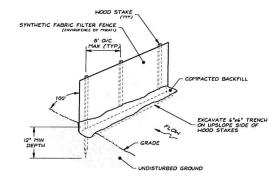





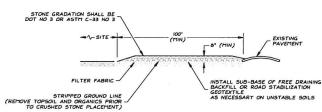

CROSS SECTION

NOTES:


- I. ENTRANCE WIDTH SHALL BE FORTY-FIVE FOOT (45') MINIMUM, BUT NOT LESS THAN THE FULL WIDTH AT POINTS WHERE INGRESS OR EGRESS OCCURS
- 2. THE ENTRANCE SHALL BE MAINTAINED IN A CONDITION THAT SHALL PREVENT TRACKING OR FLOWING OF SEDIMENT ONTO PUBLIC RIGHTS-OF-MAYS, WHICH MAY REQUIRE PERIODIC TOP DRESSING WITH ADDITIONAL STOME AS CONDITIONS DETIAND AND REPAIR OR CLEANOUT OF ANY MEASURES USED TO TRAP SEDIMENT
- 3. ALL SEDIMENT SPILLED, DROPPED, MASHED OR TRACKED ONTO PUBLIC RIGHTS-OF-NAY MUST BE REMOVED IMMEDIATELY, AND PERIODIC INSPECTION AND MAINTENANCE SHALL BE PROVIDED AS NEEDED


TEMPORARY CONSTRUCTION ENTRANCE

TCE


A.R. A.R. HELD CATE MAY B. SPRONCET NO. S 0 S 2 111 C F LL ADIA IGINEI SSOCI FZO S II A CONTROL C OWNED BY
ALTY, I
ACKIN
IACKIN Z A 5 KEITH SSO g > TODA ઝ 2019-107 5 APRIL 2022 D-01

423

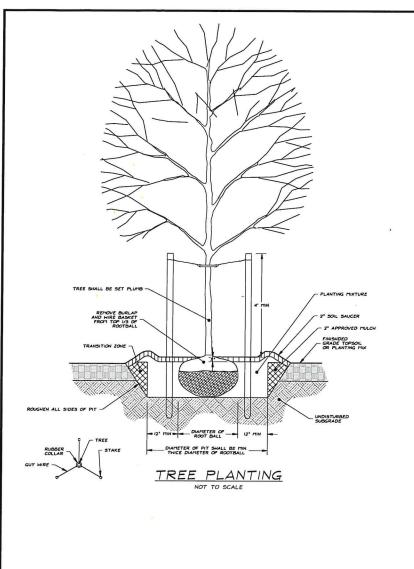

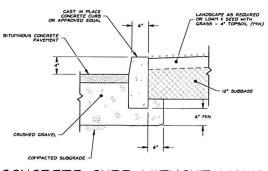


CONCRETE CURB WITHOUT WALK



PRECAST WHEEL STOP NOT TO SCALE


NOTES:

- 1. BUMPER STOPS ARE 6' LONG WITH 5" PINS
- 2. CONCRETE COMPRESSIVE STRENGTH: 4000 PSI @ 28 DAYS
- 3. METHOD OF MANUFACTURE: WET CAST
- 4. REINFORCING STEEL DEFORMED BARS CONFORM TO THE LATEST ASTM SPECIFICATION AGIS
- 5. MANUFACTURED TO CONNECTICUT DOT SPECIFICATIONS 6. UNIT WEIGHT: 300 LBS

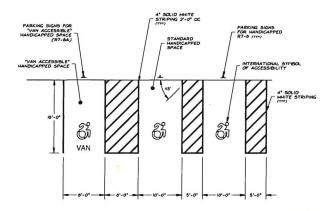

HANDICAPPED PARKING STALL LAYOUT NOT TO SCALE

BOTTOM OF RAMP
TO BE SET & MAX ABOVE
ADJACENT SURFACE

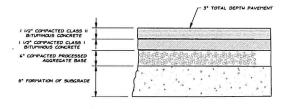

APPLY TACK COAT TO PAVEMENT FACE

SELECT MATERIALS

EXISTING GRAVEL FILL

PAVEMENT SAW CUT DETAIL

D-42

O Z N. STATE

STADIA ENGINEERING ASSOCIATES, I

SEA

MISCELLANEOUS DETAILS EPICING THE EXISTING SITE CONDITIONS AND TOPOGRAPHIC FEATURES

TODAY


2019-107

5 APRIL 2022 D-02


CONDITIONS AND INFORMERORY CONTROL OF THE CONTROL OF T

KEITH ξ.S


TYPICAL PAVEMENT DETAIL

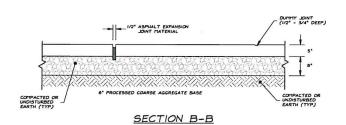

CURB CUT

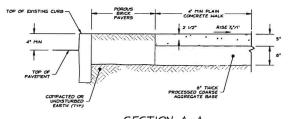

SECTION A-A

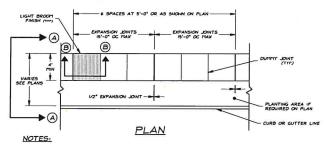

- I. MATERIALS, METHODS OF INSTALLATION, CURING, TESTING, SHALL CONFORM TO STATE OF CT DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FORM BILA OR BIS 81945 OR CURRENT SPECIFICATION FOR SUCH WORK
- 2. ANY WALKING SURFACE SHALL BE LIGHTLY BROOMED PERPENDICULAR TO THE WAY OF TRAVEL



PARKING SIGN HAMCACPED PARKING PARKING CHARLE WALDOWN TO HAMCACPE HAMCACPE HAMCACPE HAMCACPE HAMCACPE HAMCACPE HAMCACPE HAMCACP PARKING SIGN (R7-86) VAN ACCESSIBLE GGATED STELL SIGN POST	BITUHINOUS COMERTY PAYETIENT 4. COMERTY 5. TIM. CRUSHED GRAVEL COMPACTED SUBGRADE
7-0'	CONCRETE CURB AT WALK NOT TO SCALE CONTRALIANT EVERY TO FEET
FATCH DISTING HIDTH UNLESS OTHERWISE DIRECTED BY THE CITY DISMIEER	PROPERTY LINE 5'2 5'2 5'2 FASTRAL EVERY SO FEET A A A A A A A A A A A A A
- 10° DIAMETER -	S GROOVE TOOLED JOHNT CURB SECTION STREET TOOLED JOHN STREET TOOLED JO

HANDICAP PARKING SIGN

CONCRETE SIDEWALK ADJACENT TO CURB

STONETERRA GEOGRID

REINFORCED WALL

